

# SAUTER Declaration on materials and the environment

Product



Туре
Designation
Product range
Product group of eco-balance

AVM215SF132R SUT 500N valve actuator Electric actuators Positioning actuators

Manufacturer	Fr. Sauter AG Im Surinam 55, CH-4016 Basel			
Management system certified according to		Since	With	
	ISO 9001	10 Aug. 1993	SQS	
	ISO 9001:2000	10 Aug. 2002	SQS	
	ISO 14001:2004	10 Aug. 2005	SQS	
	OHSAS 18001:1999	10 Aug. 2005	SQS	
Environmentally-compatible	Basis	Management system		
product design		Fr. Sauter AG		
	Process	Business proces	S	
		<ul><li>Product innova</li><li>Ecological acc</li></ul>		

Product description	CE conformity			
	Function, operation, maintenance, servicing	PDS 51.383		
Environmental risk	Fire protection according to	EN 60695-2-11, EN 60695-10-2		
	Fire load <sup>1</sup>	7.7 MJ		
	Hazardous substances <sup>2</sup>	Conforming to RoHS 2011/65/EU		
	Banned substances (see link below)	Conforming to REACH 1907/2006/EC		
	Parts containing halogen (causingcorrosive smoke)	Printed circuit boards		
	Liquids polluting the aquatic environment	Lubricant		
	Explosive substances	None		
Packaging <sup>3</sup>	Cardboard PAP21	40.5 g		

#### **Materials**

	Total weight of	926 g	Material Safety Data	EU waste code <sup>5</sup>
	product <sup>4</sup>	920 y	Sheet (MSDS)	LO Waste Coue
Plastic				
PA66		14.2 g	Yes	20 01 39
РВТ		31.2 g	Yes	20 01 39
PC		179.6 g	Yes	20 01 39
POM		16.5 g	Yes	20 01 39
EPDM		1.2 g	Yes	20 01 39
Metal				
Steel of different allo	ys	147.7 g	Not required	20 01 40
Aluminium of all alloy	/S	316.5 g	Not required	20 01 40
Printed circuit boar	d			
Assembled PCB, lea	d-free solder	20 g	Not required	20 01 36
Various				
None				
Special component	S			
•		105 g	Not required	16 02 09

<sup>2</sup> Only applies to electrical devices
<sup>3</sup> Directive 94/62/EC and follow-on document, ruling 97/129/EC

<sup>4</sup> See **Remarks** on last page
<sup>5</sup> Directive 75/442/EEC and follow-on document, ruling 2001/118/EC


Lubricant, Shm	0.2 g	Not required	20 01 34
Cable	94.2 g	Not required	20 01 36

# A

#### Note

The following materials balance and the calculation of the environmental impact relate to type AVM215SF132R.

#### Materials balance

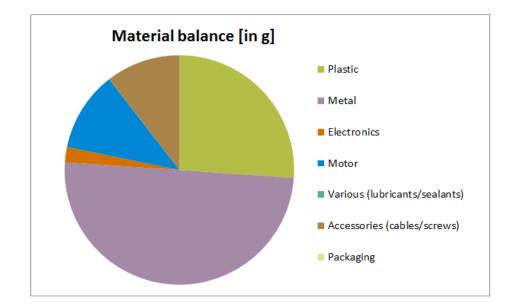

## Energy requirement in the utilisation phase

Power requirement for component


Minimum power consumption	0.45 W
Average power consumption	2 W
Typical energy consumption per year	8.4 kWh

The energy requirement evaluation was performed for a typical utilisation scenario. The European electricity mix from ecoinvent 2.2 was used to evaluate the power consumption in the utilisation phase.

### Calculation of the environmental impact

Evaluation over the entire life stage of 8 years in a typical utilisation scenario. The results shown are based on a method of ecological scarcity that combines various environmental effects into an "environmental impact points" key figure. The method is based on Switzerland's environmental targets and evaluates the individual effects depending on the "Distance to Target".

Indicator	Unit	Production	Utilisation	Disposal	Total
Global warming potential (GWP), IPCC 2007, 100a	kg CO2 eq.	6.6	36.8	0.3	43.7
Cumulative energy demand (non- renewable resources)	MJ eq.	128	745	0.6	873
Cumulative energy demand (renewable resources)	MJ eq.	11.6	56.5	0.02	68.1
Acidification potential, CML 2001	kg SO2 eg.	7.61E-02	1.52E-01	1.86E-04	2.28E-01
Eutrophication potential, CML 2001	kg PO4 eq.	4.15E-02	1.20E-01	1.39E-04	1.62E-01
Ozone creation potential, CML 2001	kg C2H4 eq.	3.76E-03			
Ecological scarcity 2006: Total	UBP	17'510	37'500	320	55'400

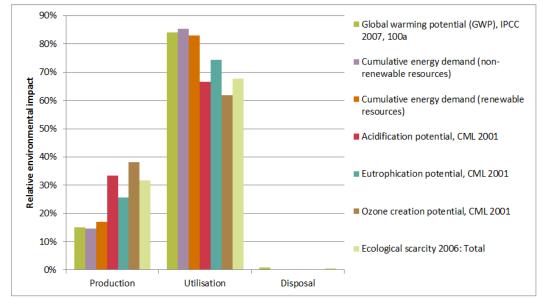

The relationship of the contributions made by the utilisation in comparison to those made by the reduction and disposal depends on the intensity of the utilisation (utilisation scenario).

Disposal	equipment (electrical/electronic s household waste. This applies in p Special treatment for special comp make ecological sense. <b>Packaging:</b> Recyclable	f as waste from electrical and electronic scrap) and must not be disposed of as particular to the assembled PCB. ponents may be compulsory by law or may (WEEE2012/19/EU) must be observed.	
Remarks	<sup>(1)</sup> Depending on the fire load for	r the type:	
	AVM215SF132R	7.7 MJ	
	<sup>(2)</sup> Depending on the weight of the type:		
	AVM215SF132R	926 g	
How the environment benefits	With these products we make a significant contribution to energy savings in buildings and to reducing global warming. In the Green Building area, our products ensure that customer requirements		
	are fulfilled optimally and that then life-cycle.	re is cost efficiency over the entire building	
	(Alternativelya place for s	pecific technical advantages)	
Extent of applicability	This declaration is an environmental declaration based on ISO 14025 and describes the environmental impact of the product over its entire life stage. The declaration is made in a compact form without an external check or registration.		
	The data gathered with existing data inventories for production processes has been evaluated from the ecoinvent 2.2 European database.		
	gy requirement during the utilisation phase oplications and average climatic conditions ased on the ecological accounting for the		

0

Disclaimer: This declaration is for information purposes only.

Deviations from the information it contains can occur without notification. Fr. Sauter AG explicitly rules out any liability for any consequences that may result due to the above information.



Your local SAUTER representative will provide further information on environmental aspects, and specifically on disposal.

#### References

Ecoinvent 2010 ecoinvent data v2.2, Swiss Centre for Life Cycle Inventories, Dübendorf FOEN 2008 eco-balances: method of ecological scarcity – eco-factors 2006, FOEN