

SAUTER Declaration on materials and the environment

Product



Type

DSDU, DSDI

Designation

Differential-pressure transmitter

Product range

Data capture

Product group of eco-balance

3, controllers and sensors

Manufacturer	Fr. Sauter AG Im Surinam 55, CH-4016 Basel	
Product description	CE conformity	
	Function, operation, maintenance, service	PDS 33.062
Environmental risk	Fire protection according to Fire load ¹ Hazardous substances ² Banned substances (see link below)	EN 60695-2-11, EN 60695-10-2 1.0 MJ Conforming to RoHS 2011/65/EU Conforming to REACH 1907/2006/EC
	Parts containing halogen (causingcorrosive smoke)	None
	Liquids polluting the aquatic environment	None
	Explosive substances	None
Packaging ³	Cardboard 180 x 135 x 50 mm	40.0 g

Materials

	Total weight of product ⁴	619.7 g	Material Safety Data Sheet (MSDS)	EU waste code ⁵
Plastic				
PA	31.1 g		Yes	20 01 39
NBR	3.5 g		Yes	20 01 39
Metal				
Steel of different alloys	47.3 g		Not required	20 01 40
Brass of different alloys	463.7 g		Not required	20 01 40
Aluminium of different alloys	72.6 g		Not required	20 01 40
Printed circuit board				
Assembled PCB, lead-free solder	9.5 g		Not required	20 01 36
Various				
None				
Special components				
None				

¹ See **Remarks** on last page

² Only applies to electrical devices

³ Directive 94/62/EC and follow-on document, ruling 97/129/EC

⁴ See **Remarks** on last page


⁵ Directive 75/442/EEC and follow-on document, ruling 2001/118/EC



Note

The materials balance and calculation of the environmental impact presented below refer to the type DSDU, DSDI.

Materials balance

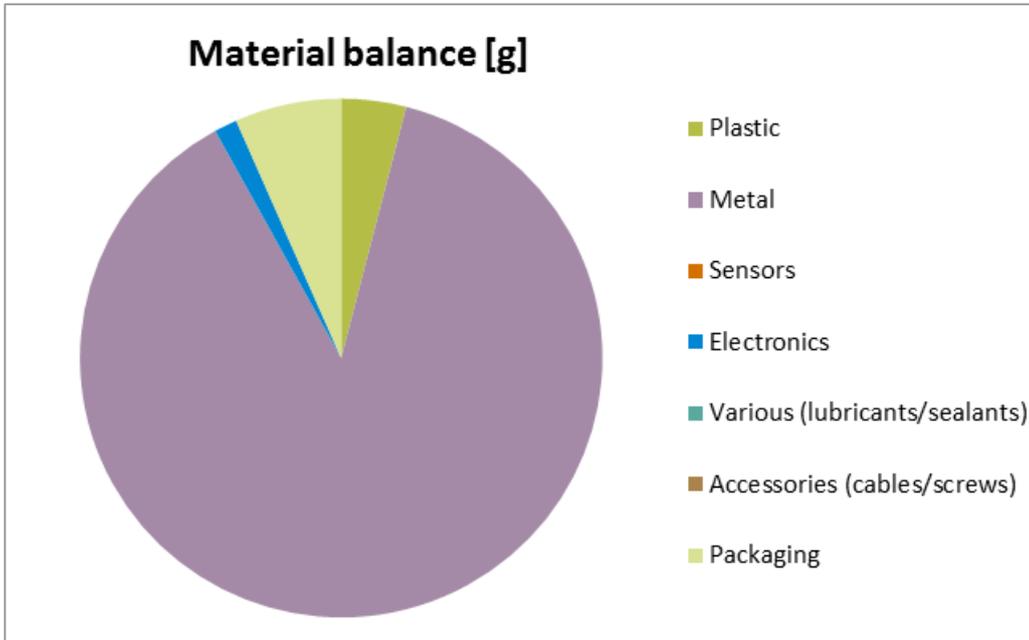

Energy requirement in the utilisation phase

Power requirement for component

Minimum power consumption

Average power consumption 1.5 W


Typical energy consumption per year 12.8 kWh

The energy requirement evaluation was performed for a typical utilisation scenario. The European electricity mix from ecoinvent 2.2 was used to evaluate the power consumption in the utilisation phase.

Calculation of the environmental impact

Evaluation over the entire life stage of 8 years in a typical utilisation scenario. The results shown are based on a method of ecological scarcity that combines various environmental effects into an “environmental impact points” key figure. The method is based on Switzerland’s environmental targets and evaluates the individual effects depending on the “Distance to Target”.

Indicator	Unit	Production	Utilisation	Disposal	Total
Global warming potential (GWP), IPCC 2007, 100a	kg CO2 eq.	3.1	56.4	0.0	59.5
Cumulative energy demand (non-renewable resources)	MJ eq.	58	1'140	0.2	1'200
Cumulative energy demand (renewable resources)	MJ eq.	10.5	87	0.00	97
Acidification potential, CML 2001	kg SO2 eq.	6.85E-02	2.32E-01	8.42E-05	3.01E-01
Eutrophication potential, CML 2001	kg PO4-- eq.	6.99E-02	1.85E-01	3.51E-05	2.55E-01
Ozone creation potential, CML 2001	kg C2H4 eq.	2.93E-03	9.35E-03	3.42E-06	1.23E-02
Ecological scarcity 2006: Total	UBP	26'900	57'500	170	85'000

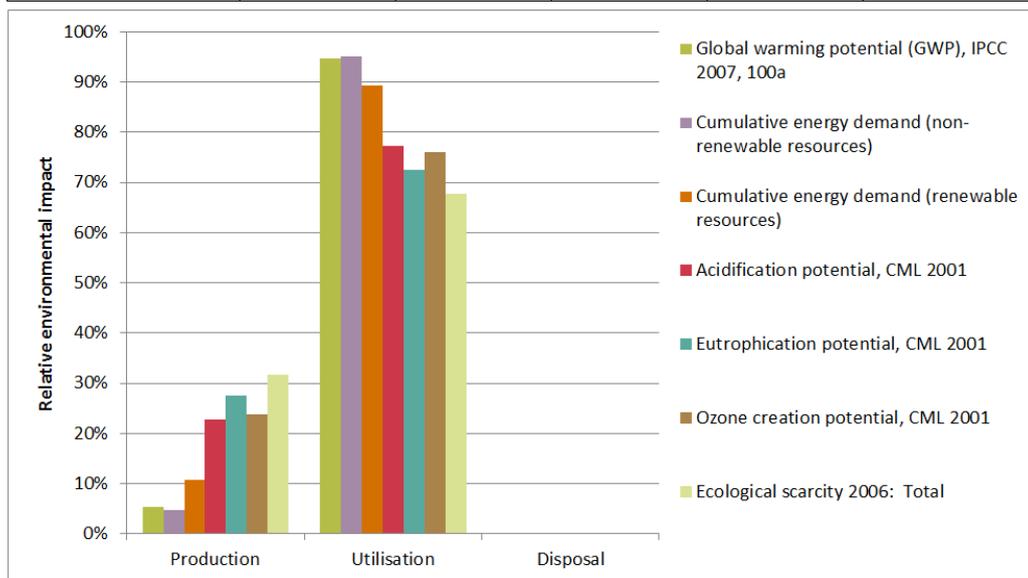

The relationship of the contributions made by the utilisation in comparison to those made by the reduction and disposal depends on the intensity of the utilisation (utilisation scenario).



Product:

The device must be disposed of as waste from electrical and electronic equipment (electrical/electronic scrap) and must not be disposed of as household waste. This applies in particular to the assembled PCB.

Special treatment for special components may be compulsory by law or may make ecological sense.

Packaging:

Recyclable

The local and currently valid laws (WEEE2012/19/EU) must be observed.

Special information:

None

Remarks

⁽¹⁾ Depending on the fire load for the type:

DSDU101F021	1.0 MJ
DSDU103F021	1.0 MJ
DSDU106F021	1.0 MJ
DSDI101F021	1.0 MJ
DSDI103F021	1.0 MJ
DSDI106F021	1.0 MJ

⁽²⁾ Depending on the weight of the type:

DSDU101F021	619.7 g
DSDU103F021	619.7 g
DSDU106F021	619.7 g
DSDI101F021	619.7 g
DSDI103F021	619.7 g
DSDI106F021	619.7 g

How the environment benefits

With these products we make a significant contribution to energy savings in buildings and to reducing global warming.

In the Green Building area, our products ensure that customer requirements are fulfilled optimally and that there is cost efficiency over the entire building life-cycle.

(Alternatively.....a place for specific technical advantages)

Extent of applicability

This declaration is an environmental declaration based on ISO 14025 and describes the environmental impact of the product over its entire life stage. The declaration is made in a compact form without an external check or registration.

The data gathered with existing data inventories for production processes has been evaluated from the ecoinvent 2.2 European database.

For the determination of the energy requirement during the utilisation phase of the product, standard HVAC applications and average climatic conditions in Switzerland were assumed, based on the ecological accounting for the corresponding product group.



Disclaimer: This declaration is for information purposes only.

Deviations from the information it contains can occur without notification. Fr. Sauter AG explicitly rules out any liability for any consequences that may result due to the above information.



Your local SAUTER representative will provide further information on environmental aspects, and specifically on disposal.

References

Ecoinvent 2010 ecoinvent data v2.2, Swiss Centre for Life Cycle Inventories, Dübendorf

FOEN 2008 eco-balances: method of ecological scarcity – eco-factors 2006, FOEN